

PRODUCT DATASHEET

LED WORKLIGHT R-STAND SOCKET 30 W 4000 K

WORKLIGHTS R-STAND SOCKET (GEN 1) | Flexible, portable worklight with included power outlets



AREAS OF APPLICATION

- Renovation
- Garages
- Basement
- Workshops

PRODUCT BENEFITS

- 2 in 1, worklight and multisocket
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

PRODUCT FEATURES

- Equipped with two power outlets, for loads up to 3000 W
- Power outlet protected by self-closing cover
- Built-in switch to control the light, power outlets remain constantly powered
- Quick-release fastener for adjustment of luminaire head angle
- 3 m cable with type E/F plug



TECHNICAL DATA

Electrical data

Nominal wattage	30.00 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	50/60 Hz


Photometrical data

Color temperature	4000 K
Color rendering index Ra	≥80
Light color (designation)	Cool White
Luminous flux	2700 lm
Luminous efficacy	90 lm/W

Light technical data

Beam angle	120 °
------------	-------

Dimensions & weight

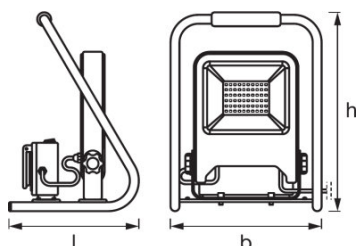

Length	190.0 mm
Width	220.0 mm
Height	290.0 mm
Product weight	1800.00 g

Colors & materials

Body material	Aluminum/Steel
Product color	Dark gray
Housing color	Dark gray
Light emitting surface material	Glass

Temperatures & operating conditions

Ambient temperature range	-20...+45 °C
----------------------------------	--------------

Additional product data

Mounting type	Standing
Mounting location	Floor

Capabilities

Dimmable	No
Adjustable	Yes
Type of connection	Protective contact Plug type
LED module replaceable	Not replaceable

Certificates & standards

Protection class	I
Type of protection	IP44
Standards	CE/EAC/REACH/ROHS

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075204614	Folding carton box 1	217 mm x 231 mm x 313 mm	1962.00 g	15.69 dm ³
4058075204621	Shipping carton box 4	475 mm x 450 mm x 330 mm	10630.00 g	70.54 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.