

## PRODUCT DATASHEET

### ENDURA Style Wall Sensor IP54 12W Dark Grey

ENDURA® Style Wall | Slim LED luminaires with high light output and optional sensor



#### Areas of application

- Outdoor use (IP44)
- Entrance lighting
- Building facades

#### Product benefits

- Energy-efficient thanks to LED technology
- Easy and quick installation

#### Product features

- Very bright and functional outdoor LED luminaires
- Die-cast aluminum housing
- Available in two housing colors
- Available with and without motion sensor



TECHNICAL DATA

Electrical data


Nominal wattage	12.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	75.000 mA
Power factor $\lambda$	> 0.5
Protection class	I
Operating mode	Mains voltage

Photometrical data

Luminous flux	740 lm
Total luminous flux of contained light sources	950 lm
Luminous efficacy	61 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	≤6 sdc <sub>m</sub>
Beam angle	107 °

Dimensions & Weight

Length	168.00 mm
Width	100.00 mm
Height	273.00 mm
Product weight	1200.00 g

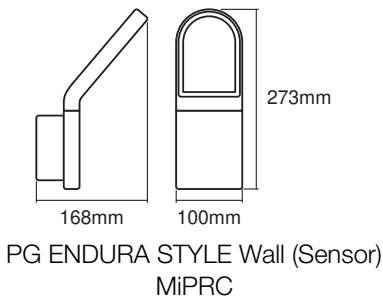

## Materials & Colors

Product color	Dark gray
Housing color	Dark gray
Body material	Aluminum
Cover material	Glass
Mercury content	0.0 mg

## Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+85 °C
Type of connection	Screw terminal
Type of protection	IP44
Dimmable	No
Mounting type	Surface
Application environment	Outdoor
With light source	Yes
Replaceable light source	No

## Lifespan

Number of switching cycles	15000
----------------------------	-------

## Sensor

Type of sensor	Light / Motion
Sensor technology	Passive infrared (PIR)

## Certificates & Standards

Standards	CE / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	No
Replaceable light source (EPREL)	Not replaceable

## EQUIPMENT / ACCESSORIES




- Complete mounting and connecting accessories included

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in

the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	ENDURA STYLE WALL
	Legal information	Safety insert G11219578
	Declarations of conformity	ENDURA STYLE LUM

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854453939	Folding box 1	134 mm x 204 mm x 296 mm	1555.00 g	8.09 dm³
4099854453946	Shipping box 4	425 mm x 285 mm x 315 mm	6220.00 g	38.15 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.