

PRODUCT DATASHEET

LED Star Classic A 40 Filament 4W 827 Clear E27

LED Retrofit CLASSIC A | LED lamps, classic bulb shape



Areas of application

- Perfect for decorative installations
- Domestic applications
- General illumination
- Outdoor use in suitable outdoor luminaires only

Product benefits

- Lamps with innovative LED "filament" technology
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp
- Lower energy consumption than incandescent or halogen lamps
- No UV and near-IR radiation in the light beam
- Instant 100 % light, no warm-up time

Product features

- Professional LED lamps for line voltage
- Not dimmable




- Lifetime up to 15,000 h
- Beam angle: up to 300°
- Lamp made of glass
- Good quality of light; color rendering index $R_a \geq 80$; constant chromaticity

TECHNICAL DATA**Electrical data**


| | |
|--|-------------|
| Nominal wattage | 4 W |
| Construction wattage | 4.00 W |
| Nominal voltage | 220...240 V |
| Operating mode | AC Mains |
| Claimed equiv. conventional lamp power | 40 W |
| Nominal current | 32 mA |
| Type of current | AC |
| Inrush current | 1.5 A |
| Operating frequency | 50/60 Hz |
| Mains frequency | 50/60 Hz |
| Max. lamp number on MCB B10 A | 400 |
| Max. lamp number on MCB B16 A | 480 |
| Power factor λ | ≥ 0.40 |

Photometrical data

| | |
|---|---------------------------|
| Luminous flux | 470 lm |
| Nominal useful luminous flux 90° | 470 lm |
| Luminous efficacy | 117 lm/W |
| Lumen main.fact.at end of nom.life time | 0.93 |
| Light color (designation) | Warm White |
| Color temperature | 2700 K |
| Color rendering index Ra | 80 |
| Light color | 827 |
| Standard deviation of color matching | ≤ 6 sdc _m |
| Rated LLMF at 6,000 h | 0.80 |
| Flickering metric (Pst LM) | 1.0 |
| Stroboscope effect metric (SVM) | ≤ 0.4 |

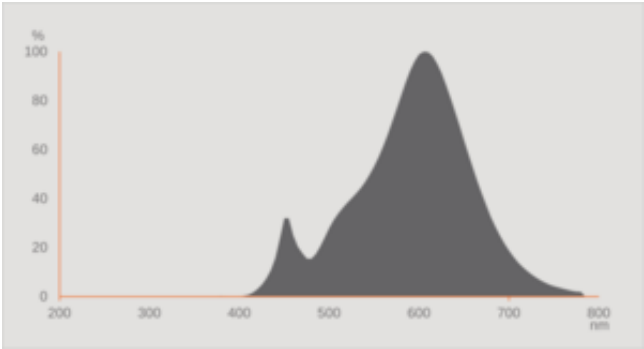

EPREL data spectral diagram PROF LEDr 2700K

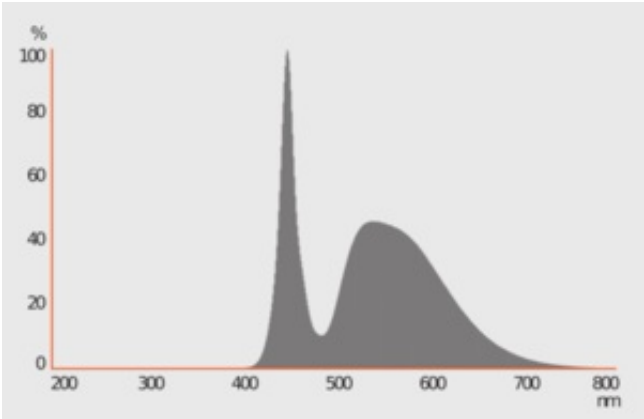

LISO spectral power distribution 6500K CRI80 v2

Light technical data

| | |
|---------------------|----------|
| Beam angle | 300 ° |
| Warm-up time (60 %) | < 0.50 s |
| Starting time | < 0.5 s |

Dimensions & Weight

| | |
|------------------|-----------|
| Overall length | 105.00 mm |
| Diameter | 60.00 mm |
| Maximum diameter | 60 mm |
| Product weight | 31.00 g |

Temperatures & operating conditions

| | |
|--------------------------------------|--------------|
| Ambient temperature range | -20...+40 °C |
| Maximum temperature at tc test point | 65 °C |

Lifespan

| | |
|--|---------|
| Lifespan L70/B50 at 25 °C | 15000 h |
| Number of switching cycles | 100000 |
| Lumen maintenance at end of service lifetime | 0.93 |

| | |
|---------------------------------------|--------|
| Rated lamp survival factor at 6,000 h | ≥ 0.90 |
|---------------------------------------|--------|

Additional product data

| | |
|-----------------------------|--|
| Base (standard designation) | E27 |
| Mercury content | 0.0 mg |
| Mercury-free | Yes |
| Design / version | Clear |
| Product remark | All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value |

Capabilities

| | |
|----------|----|
| Dimmable | No |
|----------|----|

Certificates & Standards

| | |
|--|-----------------|
| Energy efficiency class | E ¹⁾ |
| Energy consumption | 4.00 kWh/1000h |
| Type of protection | IP20 |
| Standards | CE / EAC |
| Photobiological safety group acc. to EN62778 | RG0 |

¹⁾ Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

Country-specific categorizations

| | |
|-----------------|-----------------|
| Order reference | LEDSCLA40 4W/82 |
|-----------------|-----------------|

LOGISTICAL DATA

| | |
|------------------------------|--------------|
| Temperature range at storage | -20...+80 °C |
|------------------------------|--------------|

Energy labelling regulation data acc EU 2019/2015




| | |
|---|------|
| Lighting technology used | LED |
| Non-directional or directional | NDLS |
| Mains or non-mains | MLS |
| Light source cap-type (or other electric interface) | E27 |
| Connected light source (CLS) | No |
| Color-tuneable light source | No |
| Envelope | No |
| High luminance light source | No |

| | |
|--|-----------------|
| Anti-glare shield | No |
| Correlated colour temperature type | SINGLE_VALUE |
| Standby power | 0 W |
| Claim of equivalent power | Yes |
| Length | 105.00 mm |
| Height | 60.00 mm |
| Width | 60.00 mm |
| Chromaticity coordinate x | 0.463 |
| Chromaticity coordinate y | 0.420 |
| R9 Colour rendering index | >0 |
| Beam angle correspondence | SPHERE_360 |
| Survival factor | 0.90 |
| Displacement factor | 0.40 |
| LED light source replaces a fluorescent light source | No |
| EPREL ID | 1403174,523088 |
| Model number | AC32396,AC24345 |

Safety advice

- Do not touch the lamp if broken.
- Must not be used if outer bulb is defective.

DOWNLOAD DATA

| Documents and certificates | | Document name |
|---|-----------------------------|---|
|  | Declarations of conformity | LED lamps CLA,B,G,P |
| Photometric and lighting design files | | Document name |
|  | Spectral power distribution | EPREL data spectral diagram PROF LEDr 2700K |
|  | Spectral power distribution | LISO spectral power distribution 6500K CRI80 v2 |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075112216 | Folding box 1 | 60 mm x 60 mm x 145 mm | 46.00 g | 0.52 dm ³ |
| 4058075604162 | Shipping box 6 | 202 mm x 134 mm x 120 mm | 347.00 g | 3.25 dm ³ |
| 4058075112223 | Shipping box 10 | 322 mm x 134 mm x 120 mm | 589.00 g | 5.18 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.