


## PRODUCT DATASHEET

### OT FIT 25/220...240/300 D LT2 L

OPTOTRONIC® FIT D LT2 L | Linear / Area Constant Current – Non dimmable

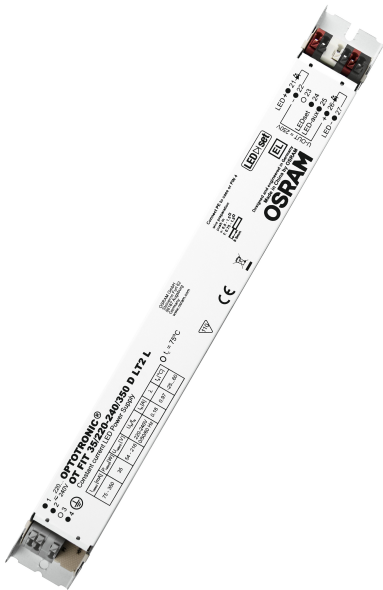

#### Areas of application

- Linear lighting for office, education, industry, storage areas and retail
- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- Suitable for luminaires of protection class I

#### Product benefits

- Flexible current setting (LEDset2)
- Lifetime: up to 100,000 h (temperature at  $T_c = 65^\circ\text{C}$ , max. 10 % failure rate)
- High quality of light thanks to low output ripple current
- Very high efficiency
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

#### Product features

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile scope of application due to output power range of up to 120 W
- Supply voltage: 220...240 V
- Available with output current range: up to 750 mA
- Non-isolated drivers


TECHNICAL DATA

Electrical data

|  |                           |
|--|---------------------------|
| Nominal wattage                          | 25.00 W                   |
| Nominal output power                     | 2...25 W                  |
| Nominal voltage                          | 220...240 V               |
| Nominal output voltage                   | 40...216 V                |
| Input voltage AC                         | 198...264 V               |
| Input voltage DC                         | 176...276 V               |
| U-OUT (working voltage)                  | 40...216 V                |
| Nominal output current                   | 35...300 mA <sup>1)</sup> |
| Output current tolerance                 | ±5 %                      |
| Output ripple current (100 Hz)           | < 5 %                     |
| Mains frequency                          | 50...60 Hz                |
| Total harmonic distortion                | 10...20 %                 |
| Power factor λ                           | > 0.94                    |
| ECG efficiency                           | up to 90 %                |
| Device power loss                        | 3,0 W                     |
| Max. ECG no. on circuit breaker 10 A (B) | 63                        |
| Max. ECG no. on circuit breaker 16 A (B) | 100                       |
| Max. ECG no. on circuit breaker 25 A (B) | -                         |
| Surge capability (L/N-Ground)            | 2 kV                      |
| Surge capability (L-N)                   | 1 kV                      |
| Galvanic isolation                       | Non isolated              |

1) ±5%

Dimensions & Weight



|                                  |                           |
|----------------------------------|---------------------------|
| Length                           | 280.00 mm                 |
| Mounting hole spacing, length    | 270,0 mm                  |
| Width                            | 30.00 mm                  |
| Height                           | 21.00 mm                  |
| Cable cross-section, input side  | 0.5...1.5 mm <sup>2</sup> |
| Cable cross-section, output side | 0.5...1.5 mm <sup>2</sup> |

|                                      |              |
|--------------------------------------|--------------|
| Wire preparation length, input side  | 8,5...9,5 mm |
| Wire preparation length, output side | 8,5...9,5 mm |
| Product weight                       | 153.00 g     |

### Colors & materials

|                 |       |
|-----------------|-------|
| Casing material | Metal |
| Body material   | Metal |

### Temperatures & operating conditions

|  |                        |
|--|------------------------|
| Ambient temperature range                | -20...+60 °C           |
| Maximum temperature at tc test point     | 75 °C                  |
| Max.housing temperature in case of fault | 110 °C                 |
| Permitted rel. humidity during operation | 5...85 % <sup>1)</sup> |

<sup>1)</sup> Maximum 56 days/year at 85 %

### Lifespan

|              |                                  |
|--------------|----------------------------------|
| ECG lifetime | 50000 h / 100000 h <sup>1)</sup> |
|--------------|----------------------------------|

<sup>1)</sup> At maximum T<sub>c</sub> = 75°C / 10% failure rate / At T<sub>c</sub> = 65°C / 10% failure rate

### Additional product data

|              |    |
|--------------|----|
| Encapsulated | No |
|--------------|----|

### Capabilities

|  |                      |
|--|----------------------|
| Dimmable                               | No                   |
| Overheating protection                 | Automatic reversible |
| Overload protection                    | Automatic reversible |
| No-load proof                          | Yes                  |
| Short-circuit protection               | Automatic reversible |
| Max. cable length to lamp/LED module   | 2,0 m                |
| Suitable for fixtures with prot. class | I                    |
| Suitable for emergency lighting        | Yes                  |
| Type of connection, output side        | Push terminal        |








### Certificates & Standards

|                           |   |
|---------------------------|---|
| Approval marks – approval | CE / EL / VDE-EMC / ENEC 10 / CCC / RCM   |
| Standards                 | Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 62384 /<br>Acc. to EN 61000-3-2 / Acc. to EN 61000-3-3 / Acc. to EN 61547 |
| Protection class          | I   |
| Type of protection        | IP20  |

## LOGISTICAL DATA

|                              |              |
|------------------------------|--------------|
| Temperature range at storage | -40...+85 °C |
|------------------------------|--------------|

## DOWNLOAD DATA

|  | Documents and certificates             | Document name  |
|--|--|--|
|    | User instruction / safety instructions | OPTOTRONIC® LED Power Supply   |
|    | Declarations of conformity             | EATON(CEAG) Conformity declaration AM10893_OT_FIT_25_220-240_300_D_LT2_L |
|    | Declarations of conformity             | EU Declaration of Conformity 3461268 (EN)                                |
|    | Declarations of conformity             | INOTEC Conformity declaration AM10893_OT_FIT_25_220-240_300_D_LT2_L      |
|    | Certificates                           | VDE ENEC Certificate 40038085  |
|    | Certificates                           | 730563_VDE Certificate   |
|  | Certificates                           | CCC Certificate 2018171002002243   |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume               |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4052899990289 | Unpacked<br>1                |                                      |              |                      |
| 4052899990296 | Shipping box<br>20           | 305 mm x 161 mm x 104 mm             | 3237.00 g    | 5.11 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.