


## PRODUCT DATASHEET

### QTP-DL 2X55 GII

QUICKTRONIC® PROFESSIONAL DL | ECG for CFL

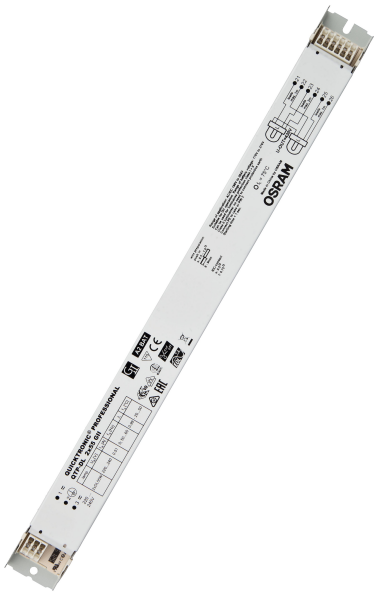

---

#### Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Open-plan offices, corridors and storage rooms
- Public buildings
- Suitable for luminaires of protection classes I and II

---

#### Product benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

---

#### Product features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating

- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Lamp operation: to EN 60929
- Safety: to EN 61347-2-3

## TECHNICAL DATA

### Electrical data

Nominal wattage	122.00 W
Nominal voltage	220...240 V
Input voltage AC	198...264 V
Input voltage DC	176...276 V <sup>1)</sup>
U-OUT (working voltage)	430 V
Inrush current	28 A
Mains frequency	50/60 Hz
Max. ECG no. on circuit breaker 10 A (B)	8 <sup>2)</sup>
Max. ECG no. on circuit breaker 16 A (B)	13 <sup>2)</sup>
Operating frequency	40...50 kHz

1) Minimum voltage for lamp ignition: 198 V

2) Type B

### Light technical data

Starting time	1 s
---------------	-----

### Dimensions & Weight

Length	360.00 mm
Mounting hole spacing, length	350,0 mm
Width	30.00 mm
Height	21.00 mm
Product weight	265.00 g

### Colors & materials

Casing material	Metal
Body material	Metal

### Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	75 °C
Max.housing temperature in case of fault	110 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

1) Maximum 56 days/year at 85 %

## Lifespan

ECG lifetime	50000 h <sup>1)</sup>
--------------	-----------------------

<sup>1)</sup> At T<sub>case</sub> = 75°C at T<sub>c</sub> point / 10% failure rate

## Capabilities

Dimmable	No
Max. cable length to lamp/LED module	2.0 m / 1.0 m
Suitable for fixtures with prot. class	I / II
End of lamp life safety shutdown	EOL T.2







## Certificates &amp; Standards




Approval marks – approval	VDE / VDE-EMC / ENEC 10 / GOST / RCM
Standards	Acc. to EN 61347-2-3 / Acc. to EN 60929 / Acc. to EN 55015:2006 + A1:2007 / Acc. to EN 61000-3-2 / Acc. to EN 61547
Protection class	I/II
Type of protection	IP20
Energy efficiency class	A2
EEL – Energy Label	A2 BAT

## LOGISTICAL DATA

Temperature range at storage	-40...+85 °C
------------------------------	--------------

## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	592511_EAC QTP-DL
	Declarations of conformity	339525_Declaration of Conformity (GB)
	Certificates	504181_VDE-EMC-Certificate QTP DL_TE
	Certificates	335097_INOTEC
	Certificates	334956_EMC-Marks approval – QTP-M
	Certificates	335151_CEAG

Documents and certificates		Document name
	Certificates	334954_ENEC-Marks approval
	Certificates	335169_Manufacturer's declaration – Lamp/ECG combinations: Frequent switching
CAD/BIM files		Document name
	CAD data 3D PDF	313392_360x30x21 9900024

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321390172	Unpacked 1		265.00 g	
4008321390189	Shipping box 20	392 mm x 98 mm x 165 mm	5471.00 g	6.34 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.