


PRODUCT DATASHEET

HAZ HB 080 HUV D 8 50 GR

HIGH BAY HAZARDOUS LOCATION | High Bay luminaire for Hazardous Location

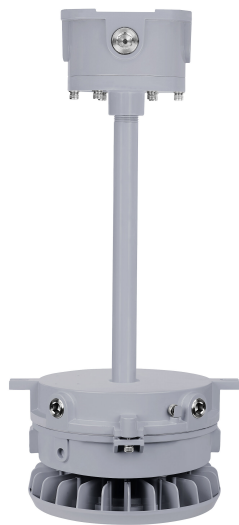

PERFOR-
MANCE
CLASS

TECHNICAL DATA

Electrical data

Nominal wattage	80.00 W
Nominal voltage	277...480 V

Photometrical data

Luminous flux	12000 lm
Luminous efficacy	150 lm/W
Color temperature	5000 K
Color rendering index Ra	80

Dimensions & Weight

Diameter	270.00 mm
Height	173.00 mm
Product weight	5885.00 g

Materials & Colors

Product color	Gray
Housing color	Gray
Mercury content	0.0 mg

Application & Mounting

Dimmable	Yes
Type of dimming	0-10V
Mounting type	Suspended
Replaceable light source	No

Certificates & Standards

Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------

Accessories Optional

Product image	Product name	EAN
	HAZ HB BRACKET SM	0046135611995
	HAZ HB BRACKET LRG	0046135612008

Product image	Product name	EAN
	HAZ HB PIPE STRAIGHT	0046135612022
	HAZ HB JBOX GRAY	0046135612039
	HAZ HB ADAPTER APP GRAY	0046135601194

DOWNLOAD DATA

Documents and certificates		Document name
	Extended installation guide	HAZARDOUS HIGH BAY
	Product information bulletin	LEDLUM246 LEDVANCE LUMINAIRES HIGH BAY HAZARDOUS LOCATION

Photometric and lighting design files		Document name
	IES file (IES)	Hazardous High Bay

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854606083	Shipping box 1	450 mm x 450 mm x 280 mm	6374.00 g	56.70 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.